


Step 1: You should DIY a upgrade cable for Smart.Port according to the schematic. This is Frsky Smart.Port cable and FUC-3 below :

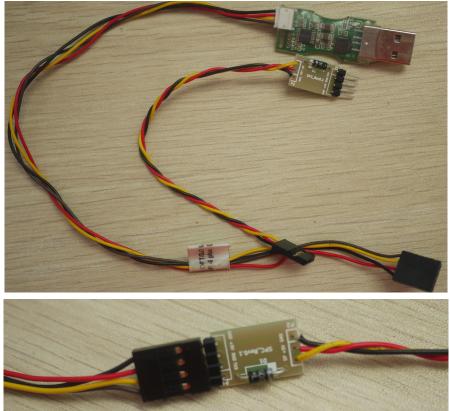

Step 2: Change pin sequence, and remove the 5V pin.

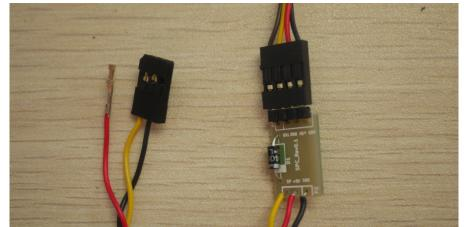

Step 3: Plug the "Ground" and "Smart.Port" pin to the back of the Taranis like this.

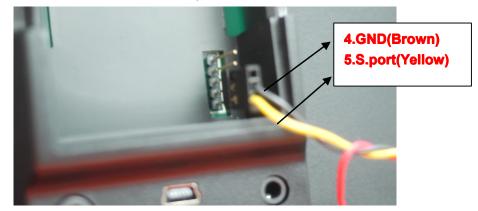

Step 4: open "frsky_update_Sport.exe". Choose the right com and select the .frk file.

frsky update Spo 11bge	c_s_dw2-1.dl]	
qextserialport. dll 🔬 QtCor. 4.6.0.	e4. dll . O	
S.Port @ 📕 📕 COM4 💌		
	0%	
File Download End		
finding device		

Step 5: Power the radio on and ensure the internal RF module is powered.Step 6: If "device is found", Click "Download".

if not, repeat Step 4 and Step 5.

S.Port @	COM4	~
		0%
File	Download	End
device found	please click Dow	

Step 7: "Firmware is updated", you have your XJT upgraded.

S.Port @	COM4	~
		100%
File	Download	End
Firmware is updated		